



RCCN 日成AGE型直角电缆防水接头 AGE Nylon Cable Gland

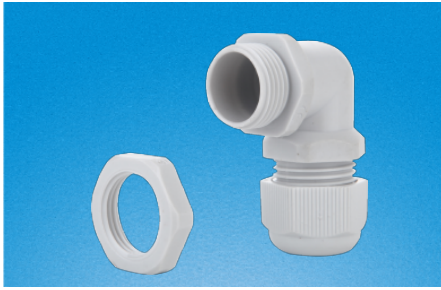


螺牙规格:公制螺牙(Metric).
 产品材质:采用环保尼龙,橡胶
 产品认证: CE,ROHS,UL尼龙原料
 防火等级:UL94V-2.
 工作温度:静态-40°C至85°C.
 颜色种类:浅灰色(RAL7035)、黑色(RAL9005).

Thread:Metric,PG,NPT
 Material:PA,NBR
 Certificates:CE, SGS,Fireproof:UL94V-2.
 Operate Temperature:-40°C to 85°C. Protect:IP68.
 Color:light gray(RAL7035)、black(RAL9005)

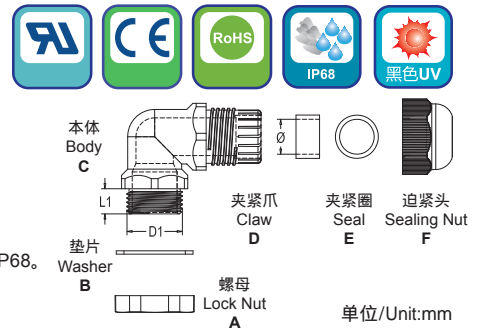

| 型号 Item No. | | 螺牙规格 | 适用电 缆外径 | 螺纹外径 | 机板开孔 | 螺纹长度 | 板手/主体高度 | 包装 |
|---------------|--------------|----------|-----------------|----------------------|---------------------------|------------------------|-----------------|----------------|
| 黑色 Black | 灰白色 White | Thread | CableRange ∅ | Thread O.D. D1 | Panel Mounting Hole | Thread Length L1 | Spanner size | Std.Pkg pcs |
| AGE公制 | | | | | | | | |
| AG16EB | AG16EW | M16*1.5 | 4-8 | 16 | 16-16.3 | 8 | 19/37 | 100 |
| AG20EB | AG20EW | M20*1.5 | 6-12 | 20 | 20-20.3 | 9 | 24/43 | 50 |
| AG22EB | AG22EW | M22*1.5 | 10-14 | 22 | 22-22.3 | 10 | 27/48 | 50 |
| AG25EB | AG25EW | M25*1.5 | 13-18 | 25 | 25-25.3 | 11 | 33/56 | 20 |
| AG32EB | AG32EW | M32*1.5 | 18-25 | 32 | 32-32.3 | 11 | 41/42/68 | 20 |
| PGE德制 | | | | | | | | |
| PG-9EB | PG-9EW | PG9 | 4-8 | 15.2 | 15.2-15.8 | 8 | 19/37 | 100 |
| PG-11EB | PG-11EW | PG11 | 5-10 | 18.6 | 18.6-18.9 | 8 | 22/39 | 50 |
| PG-13.5EB | PG-13.5EW | PG13.5 | 6-12 | 20.4 | 20.4-20.7 | 9 | 24/43 | 50 |
| PG-16EB | PG-16EW | PG16 | 10-14 | 22.5 | 22.5-22.8 | 10 | 27/48 | 50 |
| PG-21EB | PG-21EW | PG21 | 13-18 | 28.3 | 28.3-28.7 | 11 | 33/56 | 20 |
| PG-29EB | PG-29EW | PG29 | 18-25 | 37.0 | 37.0-37.4 | 11 | 41/42/68 | 20 |
| NPTE德制 | | | | | | | | |
| NPT3/8EB | NPT3/8EW | NPT 3/8" | 4-8 | 17.055 | 17.1-17.5 | 13 | 19/42 | 100 |
| NPT1/2EB | NPT1/2EW | NPT 1/2" | 6-12 | 21.223 | 21.2-21.5 | 13 | 24/43 | 50 |
| NPT3/4EB | NPT3/4EW | NPT 3/4" | 13-18 | 26.568 | 26.5-26.6 | 13 | 33/58 | 20 |
| NPT1EB | NPT1EW | NPT 1" | 18-25 | 33.227 | 33.2-33.4 | 15 | 41/42/72 | 20 |

RCCN 日成MGE型公制直角电缆防水接头 MGE Nylon Cable Gland

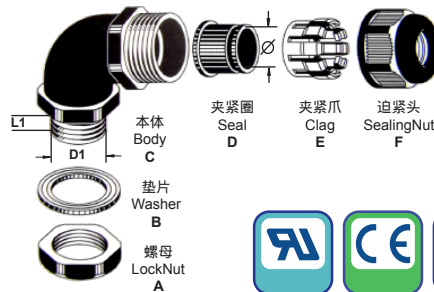

螺牙规格:公制螺牙(Metric).
 产品材质:A.C.E.F部位均采用环保尼龙原料制成.B.D采用耐老化橡胶。
 产品认证: CE,ROHS,UL尼龙原料
 防火等级:UL94V-2。
 工作温度:静态-40°C至85°C。
 防护等级:在规定的卡口范围内并使用防水垫片及夹紧圈旋紧迫紧头,达到IP68。
 颜色种类:浅灰色(RAL7035)、黑色(RAL9005)。

Thread:Metric
 Material:A.C.E.F made of NYLON66, B.D made of EPDM
 Certificates:CE, SGS,REACH.
 Fireproof:UL94V-2.
 Operate Temperature:-40°C to 85°C.
 Protect:IP68.
 Color:light gray(RAL7035)、black(RAL9005)

| 型号 Item No. | | 螺牙规格 | 适用电 缆外径 | 螺纹外径 | 机板开孔 | 螺纹长度 | 板手 | 包装 |
|-------------|--------------|---------|-----------------|----------------------|---------------------------|------------------------|------------------------|----------------|
| 黑色 Black | 灰白色 White | Thread | CableRange ∅ | Thread O.D. D1 | Panel Mounting Hole | Thread Length L1 | Spanner size A&F | Std.Pkg pcs |
| MG16EA-07B | MG16EA-07G | M16*1.5 | 4-7 | 16 | 16-16.3 | 10 | 22/22 | 50PCS |
| MG16EA-10B | MG16EA-10G | M16*1.5 | 6-10 | 16 | 16-16.3 | 10 | 22/22 | |
| MG20EA-11B | MG20EA-11G | M20*1.5 | 6-11 | 20 | 20-20.3 | 15 | 27/27 | |
| MG20EA-14B | MG20EA-14G | M20*1.5 | 9-14 | 20 | 20-20.3 | 15 | 27/27 | |