


### RCCN 日成PA尼龙波纹管 Polyethylene Corrugated Tubing

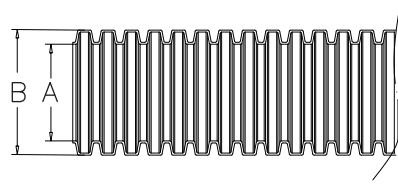

材 质: 进口PA6 尼龙(Polyamide)  
温 度:-40 -125 ,短时达到150  
产品认证: 美国UL,欧洲CE, 欧洲环保  
ROHS,REACH.

防火等级:94HB.

特 性:柔软有韧性,抗扭曲;机械,强度好可以承受重的负载;耐酸,耐切割屑液,润滑油,冷却液等;表面有光泽,耐摩擦;黑色耐紫外线,机械强度高;用 途:可保护电线电缆不受外力磨损及绝缘承载能力:可以承受脚踩和更高强度的重压,不变形,但可以迅速恢复并且本身无任何损伤.

应用场合:风电发电,地铁轨道,电力机车的车厢内使用;机械制造,电气绝缘保护,公共交通

设备:照明设备;汽车制造;航空设备;

使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可.

备 注:特殊按包装长度有起订量要求.

Material:PA (Polyamide)  
Work Temperature:-40 to125 ,  
150 in short time  
Color:black

Certificates: CE,ROHS,REACH.  
Characteristics:good luster of exterior,stronger machinism loading, perfect flexible

Functions:insulated,protect cables and wires

Loading ability:uneasy to change shape,reshape speedly without hurt body

Where to use:Equipment,machines, electricity sets,and so on.

How to use:insert cables or wires to RCCN flexible conduit



Remarks: special packing length come with MOQ work temperature tested according to RCCN factory

test machines

单位/Unit:mm

型号	Item No.	规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black Ral9005	深灰色 Gray Ral7037	Sizes	I.D. A	O.D. B	Stat.r	Dyn.r	Packing M
BG-07NB	BG-07NG	1/4"	6.5	10.0	13	35	100M
BG-10NB	BG-10NG	5/16"	10.0	13.0	20	45	100M
BG-12NB	BG-12NG	-	12.0	15.8	35	55	100M
BG-15NB	BG-15NG	3/8"	14.3	18.5	40	65	100M
BG-17NB	BG-17NG	1/2"	17.0	21.2	45	75	100M
BG-23NB	BG-23NG	3/4"	23.0	28.5	55	100	50M
BG-29NB	BG-29NG	1"	29.0	34.5	65	120	50M
BG-36NB	BG-36NG	1 1/4"	36.0	42.5	90	150	50M
BG-48NB	BG-48NG	2"	48.0	54.5	100	190	25M
BG-08NB	BG-08NG	9/32"	8.0	11.5	13	25	100M
BG-11NB	BG-11NG	-	11.0	14.0	20	45	100M
BG-16NB	BG-16NG	-	14.5	20.0	45	75	100M
BG-20NB	BG-20NG	-	20.0	25.0	50	85	50M
BG-25NB	BG-25NG	-	25.5	31.5	50	110	50M

### RCCN 日成PA尼龙阻燃波纹管 Polyethylene Corrugated Tubing

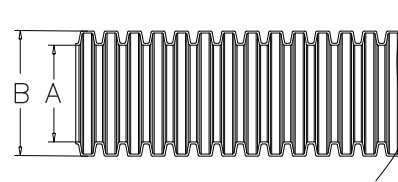

材 质: 进口PA6 尼龙(Polyamide)  
温 度:-40 -125 ,短时达到150  
产品认证: 美国UL,欧洲CE, 欧洲环保  
ROHS,REACH.

防火等级:94V0.

特 性:柔软有韧性,抗扭曲;机械,强度好可以承受重的负载;耐酸,耐切割屑液,润滑油,冷却液等;表面有光泽,耐摩擦;黑色耐紫外线,机械强度高;用 途:可保护电线电缆不受外力磨损及绝缘承载能力:可以承受脚踩和更高强度的重压,不变形,但可以迅速恢复并且本身无任何损伤.

应用场合:风电发电,地铁轨道,电力机车的车厢内使用;机械制造,电气绝缘保护,公共交通

设备:照明设备;汽车制造;航空设备;

使用方法:将电线电缆穿入管内,再配合日成系列软管接头使用即可.

备 注:特殊按包装长度有起订量要求.

Material:PA (Polyamide)  
Work Temperature:-40 to125 ,  
150 in short time  
Color:black

Certificates: CE,ROHS,REACH.  
Characteristics:good luster of exterior,stronger machinism loading, perfect flexible

Functions:insulated,protect cables and wires

Loading ability:uneasy to change shape,reshape speedly without hurt body

Where to use:Equipment,machines, electricity sets,and so on.

How to use:insert cables or wires to RCCN flexible conduit

Remarks: special packing length come with MOQ work temperature tested according to RCCN factory

test machines

单位/Unit:mm

型号	Item No.	规格	内径	外径	静态弯曲半径	动态弯曲半径	包装
黑色 Black Ral9005	深灰色 Gray Ral7037	Sizes	I.D. A	O.D. B	Stat.r	Dyn.r	Packing M
BG-07NBV0	BG-07NGV0	1/4"	6.5	10.0	13	35	100M
BG-10NBV0	BG-10NGV0	5/16"	10.0	13.0	20	45	100M
BG-12NBV0	BG-12NGV0	-	12.0	15.8	35	55	100M
BG-15NBV0	BG-15NGV0	3/8"	14.3	18.5	40	65	100M
BG-17NBV0	BG-17NGV0	1/2"	17.0	21.2	45	75	100M
BG-23NBV0	BG-23NGV0	3/4"	23.0	28.5	55	100	50M
BG-29NBV0	BG-29NGV0	1"	29.0	34.5	65	120	50M
BG-36NBV0	BG-36NGV0	1 1/4"	36.0	42.5	90	150	50M
BG-48NBV0	BG-48NGV0	2"	48.0	54.5	100	190	25M
BG-08NBV0	BG-08NGV0	9/32"	8.0	11.5	13	25	100M
BG-11NBV0	BG-11NGV0	-	11.0	14.0	20	45	100M
BG-16NBV0	BG-16NGV0	-	14.5	20.0	45	75	100M
BG-20NBV0	BG-20NGV0	-	20.0	25.0	50	85	50M
BG-25NBV0	BG-25NGV0	-	25.5	31.5	50	110	50M